



**AVK SUPA LOCK™ STRAIGHT FITTING W. PRK COUPLING,
BRASS, PN 16**

106/02

004

For PE pipes, Supa Lock™ spigot end / PRK coupling

AVK Supa Lock™ is a patented service connection system consisting of valves, tapping saddles and fittings with an easy two-step assembly without threads or use of tools. Supa Lock™ features a push-in and quick-lock joint secured by a safety retainer which prevents demounting under pressure. The fitting has one Supa Lock™ spigot end and one end with PRK coupling for PE pipes.


Product Description:

Supa Lock™ straight fitting of brass with PRK coupling for water and neutral liquids to max. 70° C

Features:

- Body of dezincification resistant brass complying with the EU directive
- Easy two-step assembly by pushing the Supa Lock™ spigot end into the Supa Lock™ socket end and clicking on the safety retainer
- The safety retainer is easy to mount and demount, and as extra safety the patented Supa Lock™ joint prevents demounting when the system is under pressure
- Designed with rotation stop to prevent the fitting from rotating during the tapping/drilling process
- The Supa Lock™ joint is sealed by two large O-rings of drinking water approved EPDM rubber
- The PRK coupling of acetal plastic has integrated sealing and tensile resistance



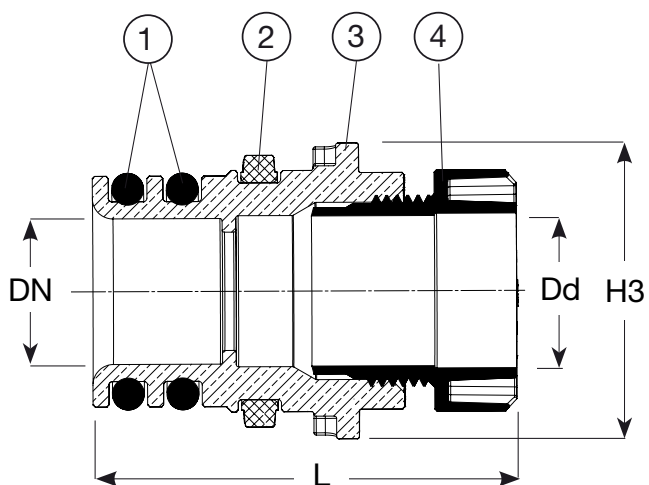

Component List:

1. O-rings	EPDM rubber	2. Safety retainer	POM
3. Body	Dezincification resistant brass	4. PRK coupling	Acetal plastic

Components may be substituted with equivalent or higher class materials without prior notification.

Reference Nos. and Dimensions:

AVK ref. nos	DN mm	Dd mm	L mm	H3 mm	Theoretic. weight kg
106-032-02-324	32	32	93	68	0.7
106-040-02-324	32	40	93	68	0.6
106-050-02-324	32	50	118	68	1.1