



## AVK SUPA LOCK™ BLIND PLUG, PN 16

106/00

With Supa Lock™ spigot end and handle

003



AVK Supa Lock™ is a patented service connection system consisting of valves, tapping saddles and fittings with an easy two-step assembly without threads or use of tools. Supa Lock™ features a corrosion protected push-in and quick-lock joint secured by a safety retainer which prevents demounting under pressure. The blind plug is used for temporary or permanent plugging of a Supa Lock™ valve or spacer and has a Supa Lock™ spigot end and a handle for easy mounting and demounting.


### Product Description:

Supa Lock™ blind plug for water and neutral liquids to max. 70° C

### Features:

- Fully coated with epoxy according to DIN 30677-2, GSK approved
- Easy two-step assembly by pushing the Supa Lock™ spigot end into the Supa Lock™ socket end and clicking on the safety retainer
- The safety retainer is easy to mount and demount, and as extra safety the patented Supa Lock™ joint prevents demounting when the system is under pressure
- The Supa Lock™ joint is sealed by two large O-rings of drinking water approved EPDM rubber



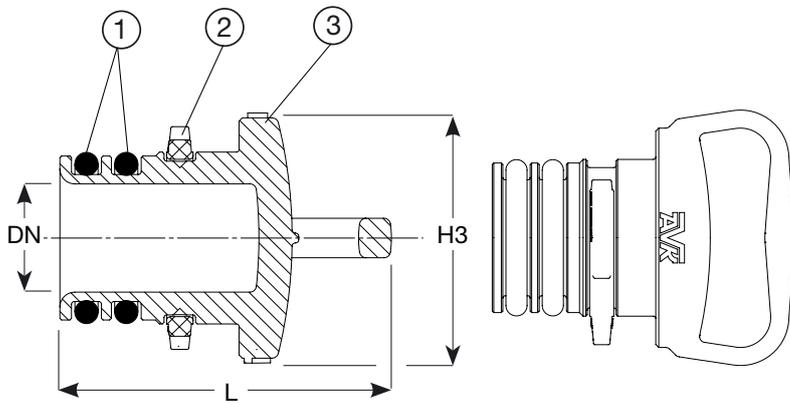

**Component List:**

|            |                                |                    |     |
|------------|--------------------------------|--------------------|-----|
| 1. O-rings | EPDM rubber                    | 2. Safety retainer | POM |
| 3. Body    | Ductile iron, GJS-500 (GGG-50) |                    |     |

Components may be substituted with equivalent or higher class materials without prior notification.

**Reference Nos. and Dimensions:**

| AVK ref. nos     | DN<br>mm | L<br>mm | H3<br>mm | Theoretic.<br>weight<br>kg |
|------------------|----------|---------|----------|----------------------------|
| 106-000-00-32464 | 32       | 85      | 100      | 0.8                        |